
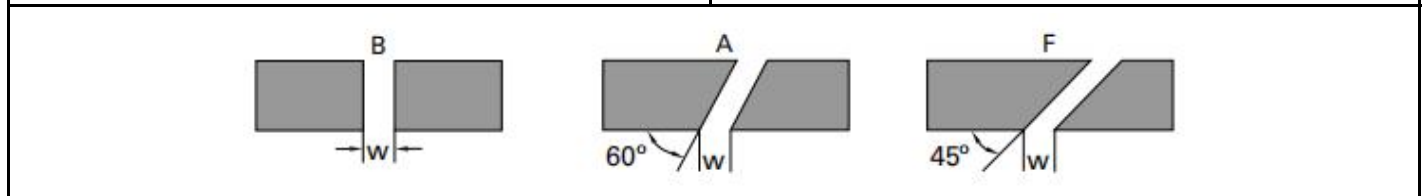


		
Guide Tape		

SEAL INFORMATION	
Material	PTFE+40%Bronze
	Fabric Reinforced Polyester
Temperature range	-40~120℃
Max pressure	≤ 31.5 MPa
Max speed	≤ 5 m/s
Application	Piston

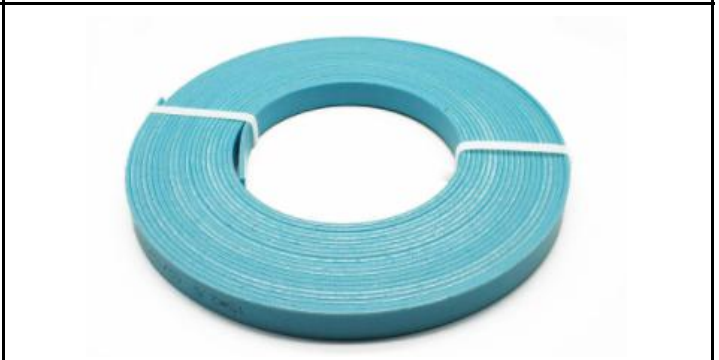

Part No.	SIZE		
	Width (mm)	Thickness (mm)	Length (m/roll)
Guide Tape	5.0	2.0	30
	5.6	1.5	40
	5.6	2.0	30
	5.6	2.5	24
	6.0	1.5	40
	6.0	2.0	30
	6.0	2.5	24
	6.3	1.5	40

Part No.	SIZE		
	d	D	h
Guide Tape	6.3	2.0	30
	6.3	2.5	24
	7.9	2.5	24
	8.0	1.5	40
	8.0	2.0	30
	8.0	2.5	24
	8.0	3.0	20

Part No.	SIZE		
	d	D	h
Guide Tape	9.7	1.5	40
	9.7	2.0	30
	9.7	2.5	24
	10.0	1.5	40
	10.0	2.0	30
	10.0	2.5	24
	10.0	3.0	20
	10.0	4.0	15

Part No.	SIZE		
	<i>d</i>	<i>D</i>	<i>h</i>
Guide Tape	12.0	2.0	30
	12.0	2.5	24
	12.0	3.0	20
	12.5	2.0	30
	12.5	2.5	24
	14.8	2.5	24
	15.0	1.5	40
	15.0	2.0	30
	15.0	2.5	24
	15.0	3.0	20
	15.0	4.0	15
	20.0	1.5	40
	20.0	2.0	30
	20.0	2.5	24
	20.0	3.0	20
	20.0	4.0	15
	20.0	5.0	11

Part No.	SIZE		
	<i>d</i>	<i>D</i>	<i>h</i>
Guide Tape	25.0	2.0	30
	25.0	2.5	24
	25.0	3.0	20
	25.0	4.0	15
	30.0	2.0	30
	30.0	2.5	24
	30.0	3.0	20
	30.0	4.0	15
	30.0	5.0	11
	35.0	2.5	24
	35.0	3.0	20
	35.0	4.0	15
	40.0	2.5	24
	40.0	3.0	20
	40.0	4.0	15
	40.0	5.0	11
	45.0	2.5	24

Part No.	SIZE		
	<i>d</i>	<i>D</i>	<i>h</i>
Guide Tape	45.0	3.0	20
	45.0	4.0	15
	50.0	2.5	24
	50.0	3.0	20
	50.0	4.0	15
	50.0	5.0	11