




SEAL INFORMATION	
Material	PU
Temperature range	-30~110°C
Max pressure	≤ 300 bar
Max speed	≤ 0.5 m/s
Application	Rod

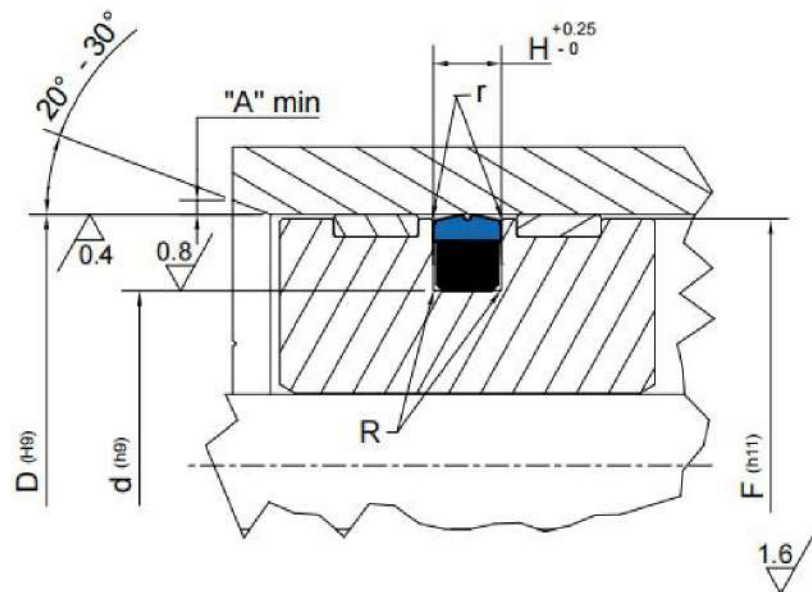

Part No.	SIZE		
	d	D	H
KR	20	12.5	3.2
KR	25	17.5	3.2
KR	25	14	4.2
KR	32	24.5	3.2
KR	32	21	4.2
KR	40	32.5	3.2
KR	40	29	4.2
KR	45	34	4.2
KR	45	32	6.3
KR	50	39	4.2
KR	50	34.5	6.3
KR	55	39.5	6.3

Part No.	SIZE		
	d	D	H
KR	60	49	4.2
KR	60	44.5	6.3
KR	63	52	4.2
KR	63	47.5	6.3
KR	63	50	6.3
KR	65	52	6.3
KR	65	49.5	6.3
KR	70	59	4.2
KR	70	54.5	6.3
KR	70	57	6.3
KR	75	59.5	6.3
KR	75	62	6.3

Part No.	SIZE		
	d	D	H
KR	80	69	4.2
KR	80	64.5	6.3
KR	85	71.5	6.3
KR	85	69.5	6.3
KR	90	74.5	6.3
KR	90	69	8.1
KR	90	69	10.5
KR	95	79.5	6.3
KR	100	84.5	6.3
KR	100	86.5	6.3
KR	100	79	8.1
KR	105	84.5	6.3

<i>Part No.</i>	<i>SIZE</i>		
	<i>d</i>	<i>D</i>	<i>H</i>
KR	105	89.5	6.3
KR	110	89	8.1
KR	115	94	8.1
KR	120	99	8.1
KR	125	109.5	6.3
KR	125	104	8.1
KR	140	119	8.1
KR	160	139	8.1
KR	180	159	8.1
KR	200	179	8.1