


SKYパッキン

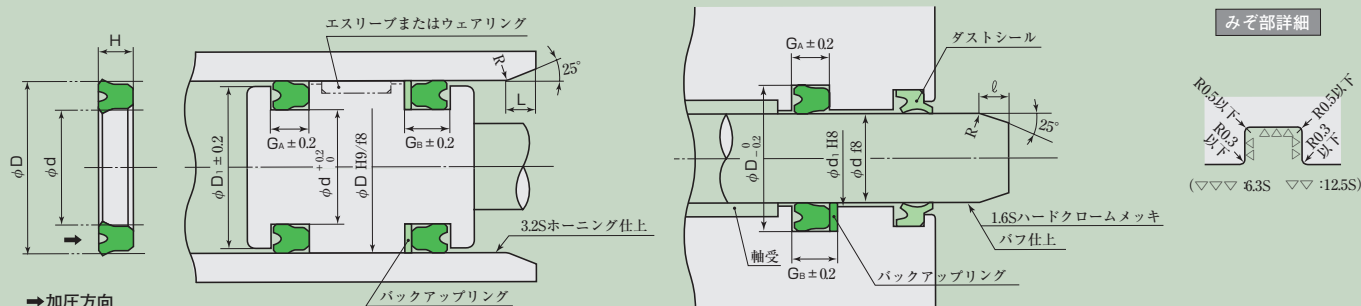

SKYパッキン寸法表

単位: mm

呼 び 番 号		パッキン及びみぞ寸法							併用バックアップリング (PT111)
標準 (RN 906)	耐熱用 (RF 905)(RF 907)	d	D	H	GA	GB	D1	d1(参考)	
SKY- 10 18 5	SKY- 10 18 5F	10	18	5	5.7	6.7	17	10.4	TCS- 20 × 12.5 TCS- 22 × 14 TCS- 24 × 16
SKY- 12 20 5	SKY- 12 20 5F	12	20	5	5.7	6.7	19	12.4	
SKY- 12.5		12.5	20	5	5.7	6.7	19	12.9	
SKY- 14	SKY- 14F	14	22	5	5.7	6.7	21	14.4	
SKY- 16	SKY- 16F	16	24	5	5.7	6.7	23	16.4	
SKY- 17 25 5		17	25	5	5.7	6.7	24	17.4	TCS- 25 × 17
SKY- 18	SKY- 18F	18	26	5	5.7	6.7	25	18.4	TCS- 26 × 18
SKY- 20	SKY- 20F	20	28	5	5.7	6.7	27	20.4	TCS- 28 × 20
SKY- 20 30 6		20	30	6	7	8.5	29	20.4	
SKY- 22	SKY- 22F	22	30	5	5.7	6.7	29	22.4	TCS- 30 × 22
SKY- 22.4	SKY- 22.4F	22.4	30	5	5.7	6.7	29	22.8	TCS- 30 × 22.4
SKY- 23.5	SKY- 23.5F	23.5	31.5	5	5.7	6.7	30.5	23.9	TCS- 31.5 × 23.5
SKY- 24 32 5		24	32	5	5.7	6.7	31	24.4	TCS- 32 × 24
SKY- 25	SKY- 25F	25	33	5	5.7	6.7	32	25.4	TCS- 33 × 25
SKY- 26 34 5		26	34	5	5.7	6.7	33	26.4	
SKY- 27 35 5		27	35	5	5.7	6.7	34	27.4	TCS- 35 × 27
SKY- 28	SKY- 28F	28	35.5	5	5.7	6.7	34.5	28.4	TCS- 35.5 × 28
SKY- 28A		28	36	5	5.7	6.7	35	28.4	
SKY- 30 38 5		30	38	5	5.7	6.7	37	30.5	TBC- 38 × 30
SKY- 30	SKY- 30F	30	40	6	7	8.5	39	30.5	TCS- 40 × 30
SKY- 31.5	SKY- 31.5F	31.5	41.5	6	7	8.5	40.5	32.0	TCS- 41.5 × 31.5
SKY- 32		32	42	6	7	8.5	41	32.5	TCS- 42 × 32
SKY- 35	SKY- 35F	35	45	6	7	8.5	44	35.5	TCS- 45 × 35
SKY- 35.5	SKY- 35.5F	35.5	45	6	7	8.5	44	36.0	TCS- 45 × 35.5
SKY- 35.5A		35.5	45.5	6	7	8.5	44.5	36.0	TCS- 45.5 × 35.5
SKY- 36	SKY- 36F	36	46	6	7	8.5	45	36.5	TCS- 46 × 36
SKY- 38 48 6		38	48	6	7	8.5	47	38.5	TBC- 48 × 38
SKY- 40	SKY- 40F	40	50	6	7	8.5	49	40.5	TCS- 50 × 40
SKY- 45	SKY- 45F	45	55	6	7	8.5	54	45.5	TCS- 55 × 45
SKY- 45A	SKY- 45AF	45	56	7	8	9.5	55	45.5	TCS- 56 × 45
SKY- 50	SKY- 50F	50	60	6	7	8.5	59	50.5	TCS- 60 × 50
SKY- 53	SKY- 53F	53	63	6	7	8.5	62	53.6	TCS- 63 × 53
SKY- 55	SKY- 55F	55	65	6	7	8.5	64	55.6	TCS- 65 × 55
SKY- 56	SKY- 56F	56	66	6	7	8.5	65	56.6	TCS- 66 × 56
SKY- 58 68 6		58	68	6	7	8.5	67	58.6	TBC- 68 × 58

★ご注文・お問合せは、呼び番号にてご指示下さい。
★表中・呼び番号が色地のものは在庫しております。

★SKY-18未満は分割みぞにしてください。
★SKY-300F以上の耐熱用材質はRF907になります。



SKYパッキン

SKYパッキン寸法表


単位：mm

呼 び 番 号		パッキン及びみぞ寸法							併用バックアップリング
標準 (RN 906)	耐熱用(RF 905)(RF 907)	d	D	H	G _A	G _B	D ₁	d ₁ (参考)	(PT111)
SKY- 60	SKY- 60F	60	70	6	7	8.5	69	60.6	TCS- 70 × 60
SKY- 60A	SKY- 60AF	60	71	7	8	9.5	70	60.6	TCS- 71 × 60
SKY- 61 71 6		61	71	6	7	8.5	70	61.6	
SKY- 63	SKY- 63F	63	73	6	7	8.5	72	63.6	TCS- 73 × 63
SKY- 65	SKY- 65F	65	75	6	7	8.5	74	65.6	TCS- 75 × 65
SKY- 67	SKY- 67F	67	77	6	7	8.5	76	67.6	TCS- 77 × 67
SKY- 70	SKY- 70F	70	80	6	7	8.5	79	70.6	TCS- 80 × 70
SKY- 71	SKY- 71F	71	80	6	7	8.5	79	71.6	TCS- 80 × 71
SKY- 75	SKY- 75F	75	85	6	7	8.5	84	75.6	TCS- 85 × 75
SKY- 80	SKY- 80F	80	90	6	7	8.5	89	80.6	TCS- 90 × 80
SKY- 85 95 6		85	95	6	7	8.5	94	85.6	TBC- 95 × 85
SKY- 85	SKY- 85F	85	100	9	10	12	98	85.6	TCS- 100 × 85
SKY- 86	SKY- 86F	86	100	8.5	9.5	11.5	98	86.6	TCS- 100 × 86
SKY- 90 100 6		90	100	6	7	8.5	99	90.6	
SKY- 90	SKY- 90F	90	105	9	10	12	103	90.6	TCS- 105 × 90
SKY- 95	SKY- 95F	95	110	9	10	12	108	95.6	TCS- 110 × 95
SKY- 96 111 9		96	111	9	10	12	109	96.6	
SKY- 98	SKY- 98F	98	112	8.5	9.5	11.5	110	98.6	TCS- 112 × 98
SKY- 100	SKY- 100F	100	115	9	10	12	113	100.6	TCS- 115 ×100
SKY- 105 120 9		105	120	9	10	12	118	105.6	TBC- 120 ×105
SKY- 106	SKY- 106F	106	120	8.5	9.5	11.5	118	106.6	TCS- 120 ×106
SKY- 110 125 9		110	125	9	10	12	123	110.6	TBC- 125 ×110
SKY- 112	SKY- 112F	112	125	8.5	9.5	11.5	123	112.6	TCS- 125 ×112
SKY- 112A	SKY- 112AF	112	125	9	10	12	123	112.6	TCS- 125 ×112
SKY- 115 130 8.5		115	130	8.5	9.5	11.5	128	115.6	TBC- 130 ×115
SKY- 118	SKY- 118F	118	132	8.5	9.5	11.5	130	118.6	TCS- 132 ×118
SKY- 119 133 8.5		119	133	8.5	9.5	11.5	131	119.6	
SKY- 120 135 9		120	135	9	10	12	133	120.6	TBC- 135 ×120
SKY- 125	SKY- 125F	125	140	9	10	12	138	125.6	TCS- 140 ×125
SKY- 130 145 9		130	145	9	10	12	143	130.6	TBC- 145 ×130
SKY- 132	SKY- 132F	132	145	8.5	9.5	11.5	143	132.6	TCS- 145 ×132
SKY- 136	SKY- 136F	136	150	8.5	9.5	11.5	148	136.6	TCS- 150 ×136
SKY- 140	SKY- 140F	140	155	9	10	12	153	140.6	TCS- 155 ×140
SKY- 145	SKY- 145F	145	160	9	10	12	158	145.6	TCS- 160 ×145
SKY- 150	SKY- 150F	150	165	9	10	12	163	150.6	TCS- 165 ×150
SKY- 155	SKY- 155F	155	170	9	10	12	168	155.6	TCS- 170 ×155
SKY- 160	SKY- 160F	160	175	9	10	12	173	160.6	TCS- 175 ×160
SKY- 165	SKY- 165F	165	180	9	10	12	178	165.6	TCS- 180 ×165
SKY- 170 185 9		170	185	9	10	12	183	170.6	TBC- 185 ×170
SKY- 175	SKY- 175F	175	190	9	10	12	188	175.6	TCS- 190 ×175
SKY- 180	SKY- 180F	180	200	12	13	15.5	198	180.8	TCS- 200 ×180
SKY- 185 205 12		185	205	12	13	15.5	203	185.8	TBC- 205 ×185
SKY- 190 210 12	SKY- 190 210 12F	190	210	12	13	15.5	208	190.8	
SKY- 195 215 12		195	215	12	13	15.5	213	195.8	
SKY- 200	SKY- 200F	200	220	12	13	15.5	218	200.8	TCS- 220 ×200
SKY- 204	SKY- 204F	204	224	12	13	15.5	222	204.8	TCS- 224 ×204
SKY- 205 225 12		205	225	12	13	15.5	223	205.8	
SKY- 210 230 12	SKY- 210 230 12F	210	230	12	13	15.5	228	210.8	TBC- 230 ×210
SKY- 215 235 12		215	235	12	13	15.5	233	215.8	TBC- 235 ×215

★ご注文・お問合せは、呼び番号にてご指示下さい。
★表中・呼び番号が色地のものは在庫しております。

★SKY-18未満は分割みぞにしてください。
★SKY-300F以上の耐熱用材質はRF907になります。

SKYパッキン

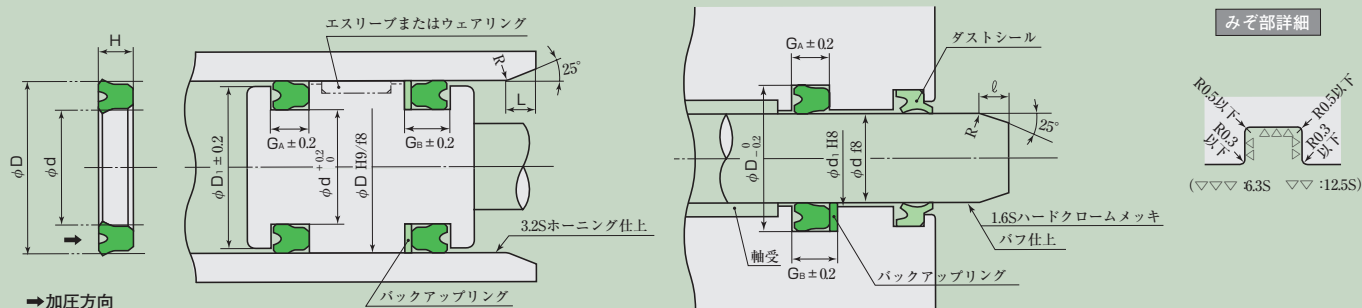

SKYパッキン寸法表

単位：mm

呼 び 番 号		パッキン及びみぞ寸法							併用バックアップリング (PT111)
標準 (RN 906)	耐熱用(RF 905)(RF 907)	d	D	H	G _A	G _B	D ₁	d ₁ (参考)	
SKY- 220 240 12		220	240	12	13	15.5	238	220.8	TBC- 240 ×220
SKY- 224	SKY- 224F	224	244	12	13	15.5	242	224.8	TCS- 244 ×224
SKY- 225 245 12		225	245	12	13	15.5	243	225.8	
SKY- 230	SKY- 230F	230	250	12	13	15.5	248	230.8	TCS- 250 ×230
SKY- 235 255 12		235	255	12	13	15.5	253	235.8	
SKY- 237 257 12		237	257	12	13	15.5	255	237.8	
SKY- 240 260 12	SKY- 240 260 12F	240	260	12	13	15.5	258	240.8	TBC- 260 ×240
SKY- 245 265 12		245	265	12	13	15.5	263	245.8	TBC- 265 ×245
SKY- 250	SKY- 250F	250	270	12	13	15.5	268	250.8	TCS- 270 ×250
SKY- 260	SKY- 260F	260	280	14	15	18	278	260.8	TCS- 280 ×260
SKY- 280	SKY- 280F	280	300	14	15	18	298	280.8	TCS- 300 ×280
SKY- 290 310 14		290	310	14	15	18	308	290.8	TBC- 310 ×290
SKY- 295	SKY- 295F	295	315	14	15	18	313	295.8	TCS- 315 ×295
SKY- 300 320 12		300	320	12	13	16	318	300.8	TBC- 320 ×300
SKY- 310 330 14		310	330	14	15	18	328	311	TBC- 330 ×310
SKY- 315		315	335	14	15	18	333	316	TCS- 335 ×315
SKY- 335		335	355	14	15	18	353	336	TCS- 355 ×335
SKY- 355		355	375	14	15	18	373	356	TCS- 375 ×355
SKY- 380	SKY- 380F	380	400	14	15	18	398	381	TCS- 400 ×380
SKY- 400		400	420	14	15	18	418	401	TCS- 420 ×400
SKY- 430		430	450	14	15	18	448	431	TCS- 450 ×430
SKY- 450		450	470	14	15	18	468	451	TCS- 470 ×450
SKY- 480		480	500	14	15	18	498	481	TCS- 500 ×480
SKY- 500 525 17		500	525	17	18	21	522	501	TBC- 525 ×500
SKY- 540 560 14		540	560	14	15	18	558	541	TBC- 560 ×540
SKY- 550 570 13		550	570	13	14	17	568	551	
SKY- 610 630 14		610	630	14	15	18	628	611	TBC- 630 ×610
SKY- 630 655 17		630	655	17	18	21	652	631	
SKY- 660 690 18		660	690	18	19	22	687	661	
SKY- 700 730 20		700	730	20	21	25	727	701	
SKY- 770 800 18		770	800	18	19	22	797	771	

★ご注文・お問合せは、呼び番号にてご指示下さい。
★表中・呼び番号が色地のものは在庫しております。

★SKY-18未満は分割みぞにしてください。
★SKY-300F以上の耐熱用材質はRF907になります。