




SEAL INFORMATION	
Material	NBR / PTFE
Temperature range	-30~100℃
Max pressure	≤ 40 MPa
Max speed	≤ 4 m/s
Application	Rod

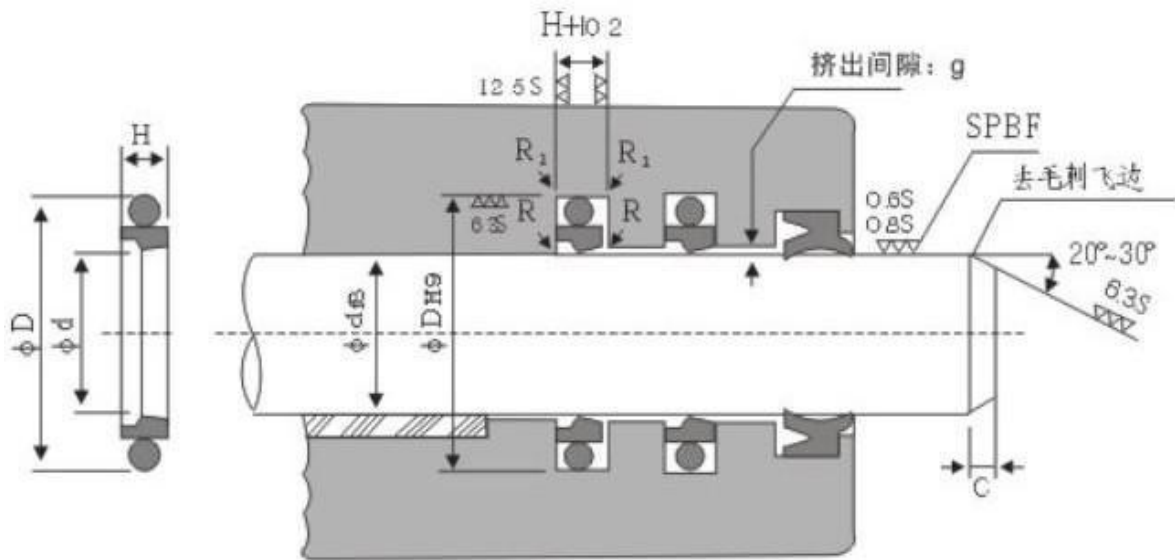

Part No.	SIZE		
	d	D	H
SK	30	45.1	6.3
SK	31.5	38.8	3.2
SK	31.5	42.2	4.2
SK	32	42.7	4.2
SK	32	39.3	3.2
SK	35	45.7	4.2
SK	35	42.3	3.2
SK	35	50.1	6.3
SK	36	46.7	4.2
SK	36	43.3	3.2
SK	38	53.1	6.3
SK	38	45.3	3.2

Part No.	SIZE		
	d	D	H
SK	38	48.7	4.2
SK	39	46.3	3.2
SK	39	49.7	4.2
SK	40	55.1	6.3
SK	40	47.3	3.2
SK	40	50.7	4.2
SK	42	57.1	6.3
SK	42	52.7	4.2
SK	43.5	54.2	4.2
SK	45	60.1	6.3
SK	45	52.3	3.2
SK	48	63.1	6.3

Part No.	SIZE		
	d	D	H
SK	48	58.7	4.2
SK	50	65.1	6.3
SK	50	60.7	4.2
SK	52	67.1	6.3
SK	52	62.7	4.2
SK	55	70.1	6.3
SK	55	65.7	4.2
SK	56	71.1	6.3
SK	56	66.7	4.2
SK	60	75.1	6.3
SK	60	70.7	4.2
SK	63	78.1	6.3

Part No.	SIZE		
	d	D	H
SK	63	73.7	4.2
SK	65	80.1	6.3
SK	65	75.7	4.2
SK	70	85.1	6.3
SK	70	80.7	4.2
SK	75	90.1	6.3
SK	75	85.7	4.2
SK	80	95.1	6.3
SK	80	90.7	4.2
SK	80	100.5	8.1
SK	82	97.1	6.3
SK	85	100-1	6.3
SK	85	95.7	4.2
SK	85	105.5	8.1
SK	90	105.1	6.3
SK	90	100.7	4.2
SK	90	110.5	8.1
SK	95	110.1	6.3
SK	95	105.7	4.2
SK	95	115.5	8.1
SK	100	115.1	6.3
SK	100	110.7	4.2
SK	100	120.5	8.1
SK	105	120.1	6.3
SK	105	115.7	4.2
SK	110	125.1	6.3
SK	110	120.7	4.2
SK	110	130.5	8.1
SK	115	130.1	6.3
SK	115	125.7	4.2
SK	120	135.1	6.3
SK	120	130.7	4.2
SK	120	140.5	0.1
SK	125	140.1	6.3
SK	125	135.7	4.2
SK	125	145.5	8.1
SK	130	145.1	6.3
SK	135	150.1	6.3
SK	135	155.5	8.1
SK	140	155.1	6.3
SK	140	160.5	8.1
SK	145	160.1	6.3
SK	150	165.1	6.3
SK	150	160.7	4.2
SK	155	170.1	6.3
SK	155	175.5	8.1
SK	160	175.1	6.3
SK	160	180.5	8.1
SK	165	180.1	6.3
SK	170	185.1	6.3
SK	170	190.5	8.1
SK	175	190.1	6.3
SK	180	195.1	6.3
SK	180	200.5	8.1
SK	185	200.1	6.3
SK	190	205.1	6.3
SK	190	210.5	8.1
SK	200	220.5	8.1

Part No.	SIZE		
	d	D	H
SK	200	215.1	6.3
SK	210	230.5	8.1
SK	210	225.1	6.3
SK	215	235.5	8.1
SK	220	240.5	8.1
SK	220	235.1	6.3
SK	225	245.5	8.1
SK	230	250.5	8.1
SK	235	255.5	8.1
SK	240	260.5	8.1
SK	245	265.5	8.1
SK	250	270.5	8.1
SK	250	265.1	6.3
SK	256	280	8.1
SK	260	284	8.1
SK	265	285.5	8.1
SK	270	294	8.1
SK	280	304	8.1
SK	290	314	8.1
SK	300	324	0.1
SK	310	334	0.1
SK	315	335.5	e.1
SK	320	344	8.1
SK	330	354	8.1
SK	340	364	8.1
SK	350	374	8.1
SK	360	384	8.1
SK	370	394	8.1
SK	380	404	8.1
SK	390	414	8.1
SK	400	424	8.1
SK	410	434	8.1
SK	420	444	8.1
SK	430	454	8.1
SK	440	464	8.1
SK	450	474	8.1
SK	460	484	8.1
SK	470	494	8.1
SK	480	504	8.1
SK	490	514	8.1
SK	500	524	8.1
SK	510	534	8.1
SK	520	544	8.1
SK	530	554	8.1
SK	540	564	8.1
SK	550	574	8.1
SK	560	584	8.1
SK	580	604	8.1
SK	600	624	8.1
SK	610	634	8.1
SK	620	644	8.1
SK	630	654	0.1
SK	640	664	8.1
SK	650	677.3	9.5
SK	650	674	8.1
SK	656	683.3	9.5
SK	660	687.3	9.5
SK	670	697.3	9.5

Part No.	SIZE		
	d	D	H
SK	660	707.3	9.5
SK	685	712.3	9.5
SK	690	717.3	9.5
SK	700	724	8.1
SK	700	727.3	9.5
SK	710	737.3	9.5
SK	720	747.3	9.5
SK	730	757.3	9.5
SK	740	767.3	9.5
SK	750	777.3	9.5
SK	760	787.3	9.5
SK	765	792.3	9.5
SK	770	797.3	9.5
SK	780	807.3	9.5
SK	790	817.3	9.5
SK	B00	827.3	9.5
SK	B10	837.3	9.5
SK	820	847.3	9.5
SK	830	857.3	9.5
SK	840	867.3	9.5
SK	850	877.3	9.5
SK	860	887.3	9.5
SK	870	897.3	9.5
SK	975	902.3	9.5
SK	880	907.3	9.5
SK	885	912.3	9.5
SK	890	917.3	9.5
SK	900	927.3	9.5
SK	910	937.3	9.5
SK	920	947.3	9.5
SK	930	957.3	9.5
SK	940	967.3	9.5
SK	950	977.3	9.5
SK	955	962.3	9.5
SK	970	997.3	9.5
SK	980	1007.3	9.5
SK	990	1017.3	9.5
SK	1000	1038	13.8
SK	1035	1073	13.8
SK	1040	1078	13.8
SK	1040	1067.3	9.5
SK	1050	1088	13.8
SK	1050	1077.3	9.5
SK	1100	1138	13.8
SK	1120	1158	13.8
SK	1120	1147.3	9.5
SK	1180	1218	13.8
SK	1200	1238	13.8
SK	1200	1227.3	9.5
SK	1330	1368	13.8
SK	1330	1357.3	9.5
SK	1500	1538	13.8
SK	1500	1527.3	9.5