


U packing

UHS series

- **TOUGHRETHANE** (Valqua Nos. TE9625-UHS, E9625-UHS)
- **Nitrile rubber** (Valqua No. 2060-UHS)
- **Fluoro rubber** (Valqua No. 4060-UHS)

Please contact us when ordering SUPER RUBBER.

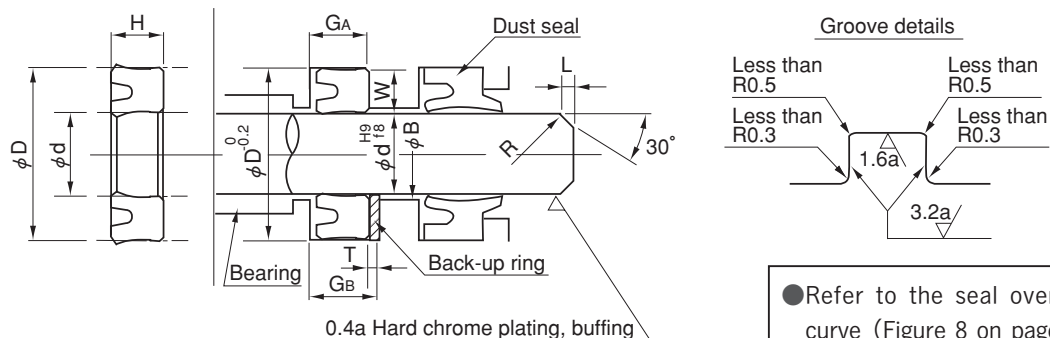

● Refer to the seal overhang limit curve (Figure 8 on page 43) when determining B dimensions.

Unit: mm

Nominal number	d	D	H	GA		GB		T	L	W					
UHS 11.2	11.2	19.2	5	5.7		7.2		1.5	2	4					
UHS 14	14	22													
UHS 16	16	24													
UHS 18	18	26													
UHS 20	20	28													
UHS 22.4	22.4	30				3.8									
UHS 23.5	23.5	31.5								4					
UHS 25	25	33									3.75				
UHS 28	28	35.5													
UHS 30	30	40													
UHS 31.5	31.5	41.5	6	7		9		5							
UHS 32	32	42													
UHS 35	35	45													
UHS 35.5	35.5	45													
UHS 38	38	48							4.75						
UHS 40	40	50								5					
UHS 45A	45	55													
UHS 45		56									7	8	10	+0.5 0	5.5
UHS 50		60													
UHS 53		53							63						
UHS 55		55	65	6	7	9	+0.3 0	2	3	5					
UHS 56	56	66													
UHS 58	58	68													
UHS 60A	60	70													
UHS 60		71	7								8	10	+0.5 0	5.5	
UHS 63		63													73
UHS 65		65													75
UHS 67		67													77
UHS 70	70	80													
UHS 71	71		4.5												
UHS 75	75			85	5										
UHS 80	80			90											
UHS 85	85			100											
UHS 90	90	105		9		10	+0.5 0	13	+0.5 0	3	4	7.5			
UHS 95	95	110													
UHS 98	98	112													
UHS100	100	115													
UHS112	112	125													
UHS115 ⁽¹⁾	115	130													
UHS125	125	140													
UHS136	136	150													
UHS140	140	155													
UHS145	145	160													

Caution 1: UHS115 is made from TOUGHRETHANE.

Note 1: For UHS14 and below, use with a split groove.

Note 2: If this packing is to be used on a piston, attaching of a support ring is desirable. (For specifics, please contact us)